


Technical Data Sheet

G25 (L)

» Oil service

G25 (L) VE

» Water service

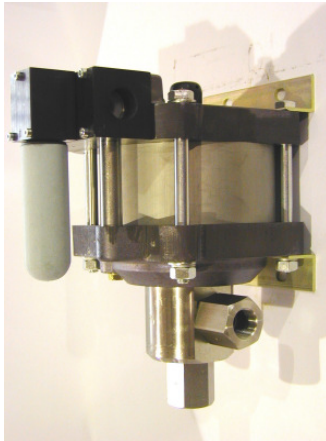

G25 (L)
single acting, single air drive head
(Standard= Bottom inlet)

Technical Data:

Air drive pressure: 1-10 bar / 14,5 - 145psi

Calculated Outlet Pressure at an air drive of 10 bar/145 psi: 280 bar/ 4,260 psi

Pressure ratio: 1:28

Displacement volume/double stroke 35.3 cm³/ 2.15 cu.inch

Connections:

Inlet: Standard: Bottom Inlet 3/4 BSP

Outlet: 3/4 BSP

Air drive: 3/4 BSP

Maximum operating temperature: 60°C

Net weight: 14.5 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package: G25(L): Polyurethan, NBR
G25(L)VE: UHMWPE, FKM

Pump Body: 1.4305

Piston: 1.4112 (hardened)

Fittings: 1.4571

Approximate Dimensions:

Height: 296 mm

Depth: 181 mm

Width: 272 mm

Available Options:

Seal material for oil service: G25 (L)

Seal material for water service: G25(L)VE

Side inlet G25(L)S/ G25(L)VES

Special inlet and outlet ports, i.e. NPT G25(L)-NPT

G25(L)VE-NPT

Special seal material to handle special fluids on request.

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve: G25(L) with C2

To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve G25(L) with C2/SVair (The required outlet pressure has to be indicated.) can be fitted to the air control unit in the air drive line:


Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

MAXIMATOR®

Maximum Pressure.



High Pressure Technology • Testing Equipment
Hydraulics • Pneumatics

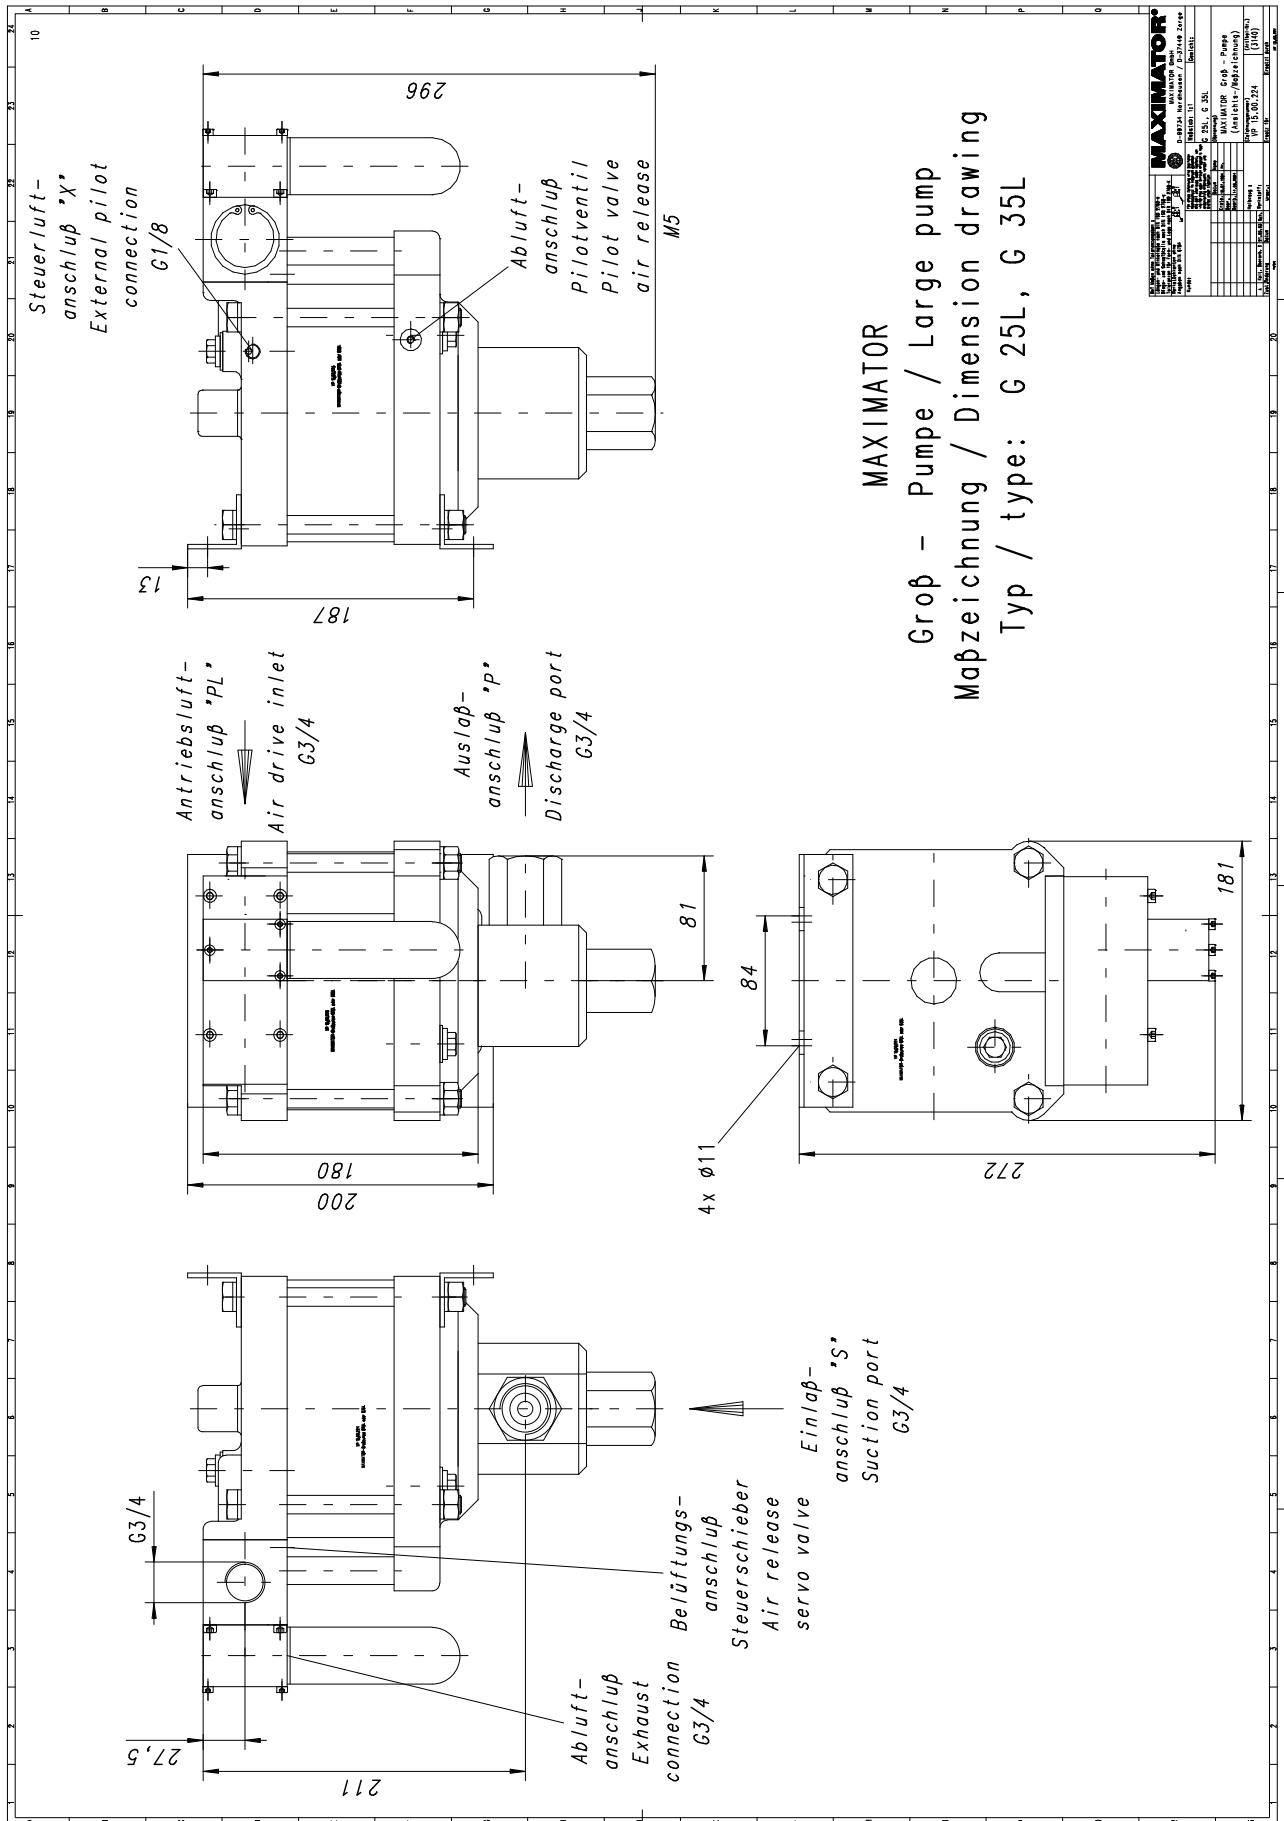

MAXIMATOR	
D-37374 Nordhausen / D-37149 Zörbig	
Tel. +49 3631 9533-0	
Fax +49 3631 9533-5010	
E-Mail info@maximator.de	
www.maximator.de	
MAXIMATOR G 25L	
MAXIMATOR G 35L	
MAXIMATOR G 45L	
MAXIMATOR G 55L	
MAXIMATOR G 65L	
MAXIMATOR G 75L	
MAXIMATOR G 85L	
MAXIMATOR G 95L	
MAXIMATOR G 105L	
MAXIMATOR G 115L	
MAXIMATOR G 125L	
MAXIMATOR G 135L	
MAXIMATOR G 145L	
MAXIMATOR G 155L	
MAXIMATOR G 165L	
MAXIMATOR G 175L	
MAXIMATOR G 185L	
MAXIMATOR G 195L	
MAXIMATOR G 205L	
MAXIMATOR G 215L	
MAXIMATOR G 225L	
MAXIMATOR G 235L	
MAXIMATOR G 245L	
MAXIMATOR G 255L	
MAXIMATOR G 265L	
MAXIMATOR G 275L	
MAXIMATOR G 285L	
MAXIMATOR G 295L	
MAXIMATOR G 305L	
MAXIMATOR G 315L	
MAXIMATOR G 325L	
MAXIMATOR G 335L	
MAXIMATOR G 345L	
MAXIMATOR G 355L	
MAXIMATOR G 365L	
MAXIMATOR G 375L	
MAXIMATOR G 385L	
MAXIMATOR G 395L	
MAXIMATOR G 405L	
MAXIMATOR G 415L	
MAXIMATOR G 425L	
MAXIMATOR G 435L	
MAXIMATOR G 445L	
MAXIMATOR G 455L	
MAXIMATOR G 465L	
MAXIMATOR G 475L	
MAXIMATOR G 485L	
MAXIMATOR G 495L	
MAXIMATOR G 505L	
MAXIMATOR G 515L	
MAXIMATOR G 525L	
MAXIMATOR G 535L	
MAXIMATOR G 545L	
MAXIMATOR G 555L	
MAXIMATOR G 565L	
MAXIMATOR G 575L	
MAXIMATOR G 585L	
MAXIMATOR G 595L	
MAXIMATOR G 605L	
MAXIMATOR G 615L	
MAXIMATOR G 625L	
MAXIMATOR G 635L	
MAXIMATOR G 645L	
MAXIMATOR G 655L	
MAXIMATOR G 665L	
MAXIMATOR G 675L	
MAXIMATOR G 685L	
MAXIMATOR G 695L	
MAXIMATOR G 705L	
MAXIMATOR G 715L	
MAXIMATOR G 725L	
MAXIMATOR G 735L	
MAXIMATOR G 745L	
MAXIMATOR G 755L	
MAXIMATOR G 765L	
MAXIMATOR G 775L	
MAXIMATOR G 785L	
MAXIMATOR G 795L	
MAXIMATOR G 805L	
MAXIMATOR G 815L	
MAXIMATOR G 825L	
MAXIMATOR G 835L	
MAXIMATOR G 845L	
MAXIMATOR G 855L	
MAXIMATOR G 865L	
MAXIMATOR G 875L	
MAXIMATOR G 885L	
MAXIMATOR G 895L	
MAXIMATOR G 905L	
MAXIMATOR G 915L	
MAXIMATOR G 925L	
MAXIMATOR G 935L	
MAXIMATOR G 945L	
MAXIMATOR G 955L	
MAXIMATOR G 965L	
MAXIMATOR G 975L	
MAXIMATOR G 985L	
MAXIMATOR G 995L	
MAXIMATOR G 1005L	

