


Technical Data Sheet

G500 (L)S

» Oil and Water service

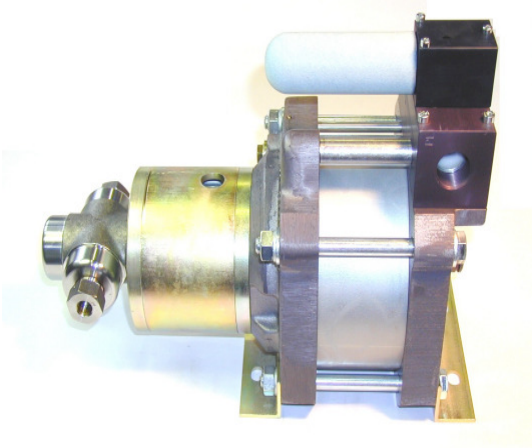

G500 (L)S  
single acting, single air drive head, side inlet  
(Bottom inlet not available)

**Technical Data:**

Air drive pressure:	1-10 bar / 14,5 - 145psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi:	4,500 bar/ 65,250 psi
Pressure ratio:	1:519
Displacement volume/double stroke	1.9 cm <sup>3</sup> / 0.12 cu.inch

**Connections:**

Inlet:	1/4 BSP
Outlet:	9/16-18UNF
Air drive:	3/4 BSP
Maximum operating temperature:	60°C
Net weight:	13.5 kg

Pressure and flow performances, please see enclosed graph.

**Wetted materials of construction:**

Seal package:	G500(L)S: Polyurethan, NBR
Pump Body:	1.4313
Piston:	1.4112 (hardened)
Fittings:	17-4-PH

**Approximate Dimensions:**

Height:	362 mm
Depth:	181 mm
Width:	272 mm

**Available Options:**

Special inlet and outlet ports, i.e. NPT	G500(L)S-NPT
Special seal material to handle special fluids on request.	

**Available Accessories:**

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	G500(L) with C2
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	G500(L) with C2/SVair (The required outlet pressure has to be indicated.)

**Please consult factory for more information.** All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.



### Leistungsdiagramm/Performance Graph G 500

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

