


### Technical Data Sheet

GX60

» Oil and Water service

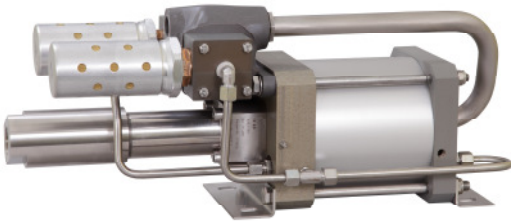

GX60  
double acting, single air drive head  
(Standard= Bottom inlet)

#### Technical Data:

Air drive pressure:	1-10 bar / 14,5 - 145psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi:	600 bar / 8,700 psi
Pressure ratio:	1:66
Displacement volume/double stroke	65 cm <sup>3</sup> / 3.97 cu.inch

#### Connections:

Inlet:	1 FNPT
Outlet:	3/8 FNPT
Air drive:	3/4 BSP female
Maximum operating temperature:	60°C
Net weight:	24.0 kg

Pressure and flow performances, please see enclosed graph.

#### Wetted materials of construction:

Seal package:	UHMWPE/FKM
Pump Body:	Stainless Steel (17-4-PH)
Piston:	Stainless Steel (17-4-PH)

#### Approximate Dimensions:

Height:	632 mm
Depth:	237 mm
Width:	244 mm

#### Available Options:

Seal package UHMWPE seals and	
FKM O-rings	GX 60-V
NBR O-rings	GX 60-N
EPDM O-rings	GX 60-E
Special seal material to handle special fluids on request.	

#### Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	GX60 with C2
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	GX60 with C2/SVair (The required outlet pressure has to be indicated.)


**Please consult factory for more information.** All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

# MAXIMATOR®

## Maximum Pressure.



High Pressure Technology • Testing Equipment  
Hydraulics • Pneumatics

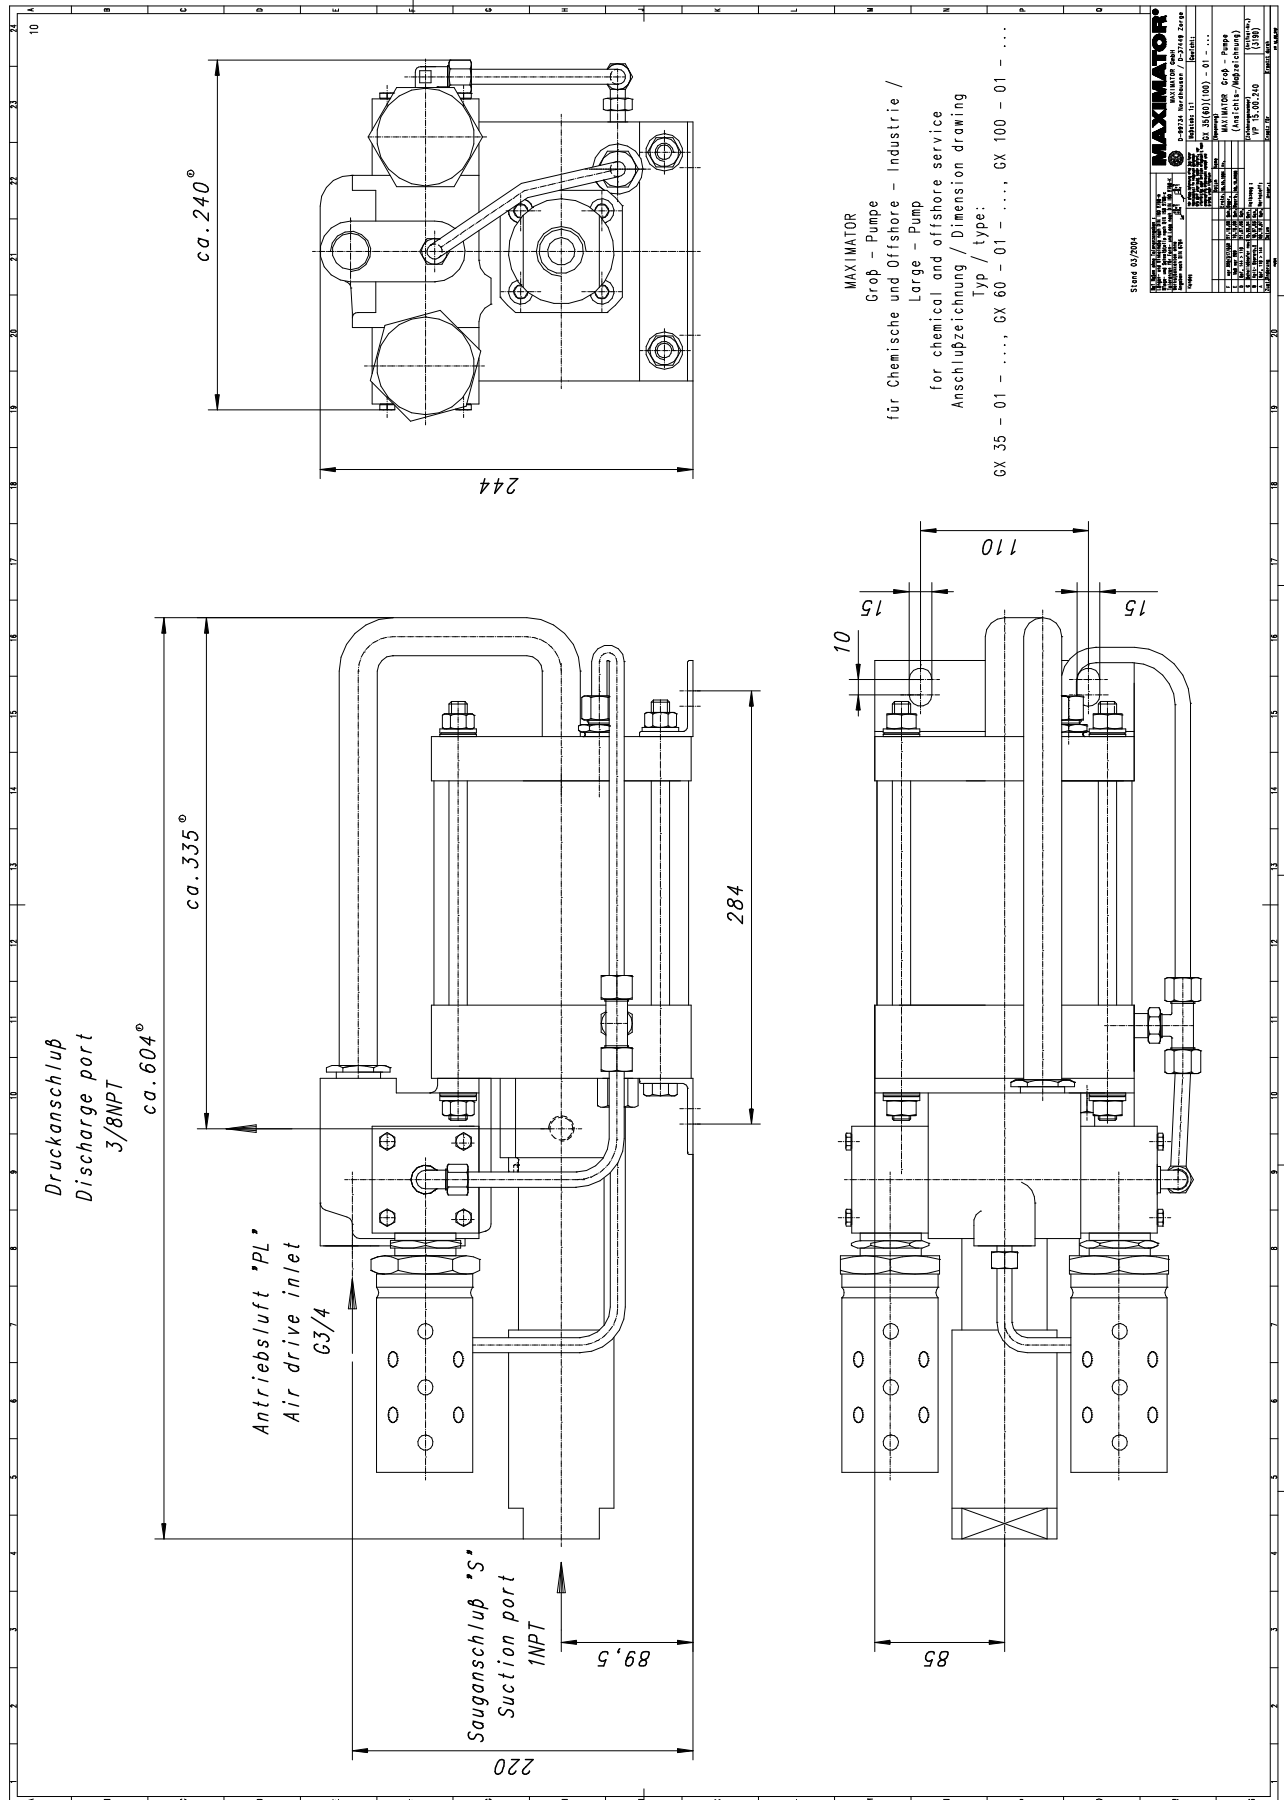



High Pressure Technology • Testing Equipment  
Hydraulics • Pneumatics

### Leistungsdiagramm/Performance Graph GX 60

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

